

- Durable Mechanism
- Noise Free
- Touch Color Graphic Panel

Auomatic Pouch Packing M/C 로타리 파우치 자동포장기(DRY용)

ST-8A1D

범용성이 뛰어나고 컴팩트한 8단계 공정구조로 쌀, 잡곡, 과자, 콩, 캔디, 마카로니, 파스트 푸드 등에 포장에 가장 적합합니다. 봉지종류의 변경을 원터치 방식에 의해 신속하고 간편하게 할 수 있으며 진동장치, 빈봉지 쉐어링방지 기능을 기본적으로 갖추고 있는 에너지 절약형 기계로, 봉지공급, 일부인, 봉지열림, 충전, 침하, 접착, 냉각에서 배출까지 자동으로 처리하는 고성능 로타리 타입의 자동충전포장기입니다.

8 point Model ST-8A1D widely usable, compact and highly suited for packing of fast food, dried food, solid materials ect has joined our machinery. Pouch supplying, date stamping, pouch opening, product filling, tapping, sealing, cooling to discharging are all automatically done by this high performance rotary type automatic packaging machine.



APPLICATION

Confectionery, Vienna Sausage, Rice, Mixed rice, Wheat flour, Dried food, Dried soup, Fast food, Seasoning etc.


Automatic Pouch Packing M/C

ST - 8A1D

FEATURES

- 파우치 사이즈 변경은 1개의 핸들만 돌려서 8단계 모두 조정이 가능하도록 자기 진단 기능이 장착된 ONE TOUCH TYPE입니다.
- 제품과 접촉하는 모든 부분은 스테인레스 스틸을 사용해 아주 위생적입니다.
- 간편한 조작성으로 누구라도 사용이 가능하며, 건조 식품 포장에 적합합니다.

DIMENSION

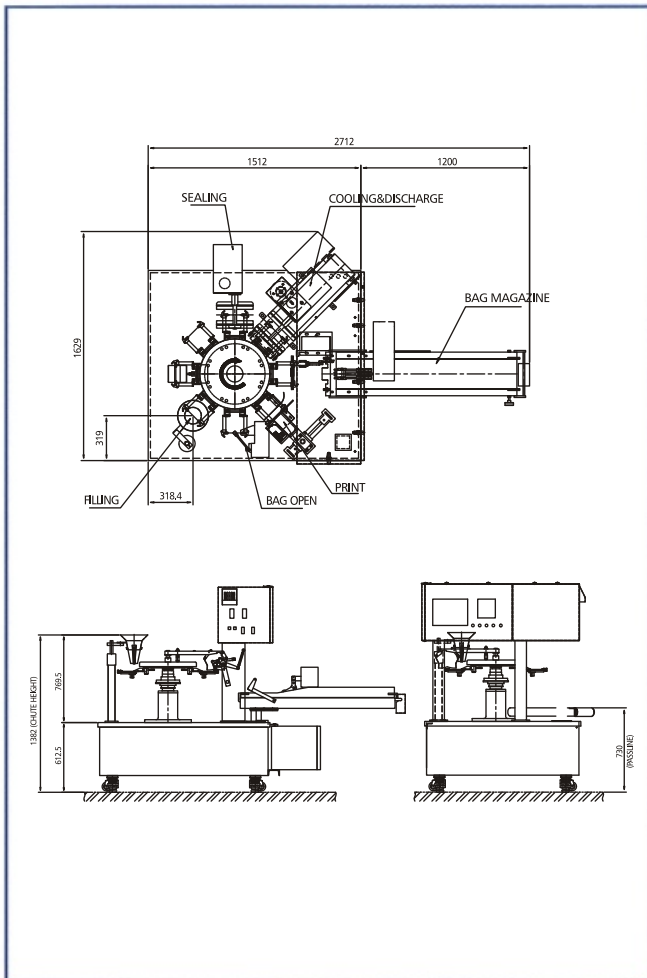

- Depends on characteristics of product and target weight.
- For improvements, specification and measurement may be changed without notice.

SPECIFICATION

Capacity	30 ~ 50Pouches/min
Pouch Size	L 140 ~ 350mm / option W 100 ~ 240mm
Pouch Material	Various Laminated Pouch
Pouch Style	Flat Pouch (3-side Presealed) Stand up Pouch
Sealing Method	Heat Seal
Power Consumption	2kW / 3Ø / 380V
Air Consumption	5kgf/cm ² , 350N l /min
Machine Dimension	W1,950 X L2,500 X H1,600mm
Machine Weight	900Kg

Standard Accessories

- Vacuum Ejector for Pouch Opening
- Heater Disconnection Alarm
- No Fill, No Seal Device
- Funnel
- Product Counter
- Tapping Device
- Date Printer (Hot Ribbon Printer)
- Deairing Device
- Pouch Open Detector

Option Accessories

- Date Printer (Inkjet printer, Thermal transfer printer)
- Zipper pouch : 120 m/m~220 m/m
- Air Compressor
- Special Pouch Magazine
- Safety Door (Cover)



SJ PACK
SEJIN TECH CO.,LTD.

129BL-5LT, 696-4 GOJAN-DONG, NAMDONG-GU, INCHEON-CITY, KOREA
TEL : 82-32-819-2004 / 7101~5 FAX : 82-32-819-0053 / 2005
E-mail : sjt2000@sejintech.co.kr www.sejintech.co.kr